

**MAIN FEATURES**

Highest quality and reliability.	Wide range of standard and optional equipment.
ComAp IntelliLite AMF 25 controller.	Engine heater – ready to load just after start.
Ready to control MAINS – GENERATOR transfer switch.	Frame anticorrosion coating – Zr.
Configured for both manual and automatic mode (MRS + AMF).	Brushless alternator.
Wide range of remote communications options.	
Schneider NSX type GCB.	



The presented image is for illustration purpose only.

**GENERAL DATA**

Code	F.0200.VAP.F
Standby power E.S.P. [kVA] / [kW]	220,0 / 176,0
Prime power P.R.P. [kVA] / [kW]	200,0 / 160,0
Prime current P.R.P [A]	289,0
Frequency [Hz]	50
Voltage [V]	400
Exhaust emission	stage II
Fuel type	Diesel (EN 590)
Fuel consumption - 50% load [l/h]	24,3
- 75% load [l/h]	35,1
- 100% load [l/h]	46,6
- 110% load [l/h]	51,8
Standard fuel tank capacity [l]	700
Autonomy with 100% load [h]	15,0
Engine control voltage [V]	24
Weight without fuel [kg]	~1770
Dimensions L x W x H [mm]	3020 x 1046 x 1896
Acoustic power Lwa [dBA]	114,1 ± 0,9
Acoustic pressure Lpa (7m) [dBA]	85,6 ± 0,9

**Nominal power P.R.P:**

Prime power available in variable load application in accordance with ISO 8528, 10% overload capacity is available for a period of 1h within a 12-hour period of operation. Average power consumption should not exceed 70% PRP for each 24 hours of work.

**Stand-by power E.S.P.:**

Emergency standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, limited to 500h of operation per year, average power consumption should not exceed 80% ESP for each 24 hour

**Remark:**

All parameters are given for reference conditions: ambient air temperature up to 40°C and site altitude above sea level 1000m.

**Norms and directives:**

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EC
- EC directive 2014/30/EC
- Emission directive 97/68/EC
- ISO 8528-1:2018, ISO 8528-5:2018
- ISO 8528-13:2016
- EN 60204-1

### STANDARD CONTROLLER

Controller type: ComAp IntelliLite AMF 25

Easy to operate, intuitive graphical interface

Real time clock with battery supply

Stan-by and Prime power applications, AMF function available

Flexible event based history with up to 350 events

3 Phase generator current measurement

Generator and Mains phase voltage measurement

Active/reactive power measurement

Active and reactive energy counter

Running hours counter, multipurpose flexible timers

Battery charging alternator circuit connection

Comprehensive gen-set protections

Wide range of communication capabilities including :

- CAN and USB on board
- Internet access using Ethernet, GPRS or 4G module
- Support for Modbus and SNMP protocols


Cloud-based monitoring and control via WebSupervisor

Active SMS or e-mails (module required)

Geofencing and tracking via WebSupervisor

Operating temperature -20 + 70°C

IP65 operator interface protection

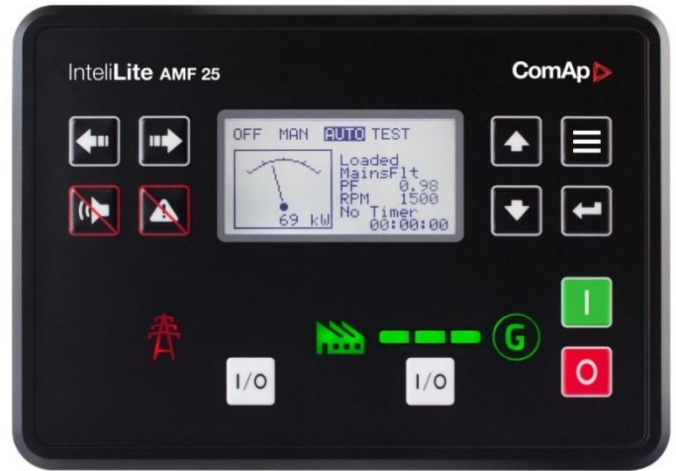

### ENGINE

Brand	Volvo
Type	TAD733GE
Made in	Germany
Engine power [kW]	176,0
Emission standard*	stage II
Rotation per minute [rpm]	1500
Engine governor	electronic
Governor class**	G3
Displacement [l]	7,2
No of cylinder	6
Fuel system	unit injectors
Electrical system [V]	24
Cooling system capacity [l]	32,0
Oil pan capacity [l]	34,0
Fuel type	Diesel (EN 590)

### ALTERNATOR

Nominal Voltage [V]	400
Nominal power factor (cos phi)	0,8
Ambient temperature, altitude	40 °C, 1000m a.m.s.l
Nominal Power [kVA]	200,0
IP protection	IP 23
No of bearing	single bearing
Coupling	direct
Technology	brushless
Short circuit maintaining capacity	270% 10s
Efficiency [%]	91,4
Insulation class	H
Total harmonic content THD [%]	2,5
Reactance Xd'' [%]	14,2
Voltage regulator type	DVR, digital
Voltage measurement	3 phases
Voltage accuracy [%]	+/- 0,25
AVR supply system	auxiliary winding
AVR supply optional	PMG
Made in	EU

\* According directive 97/68/EC non road mobile machinery engine emission.

\*\* According ISO 8528-5:2018



# FOGO FOCUSED ON GENERATORS ONLY

## Power Generator FDF 200 V

### STANDARD EQUIPMENT

Volvo TAD733GE engine	✓
Electronic engine speed governor	✓
Oil low pressure switch	✓
Oil pressure sensor	✓
Engine high temperature switch	✓
Engine high temperature sensor	✓
Engine preheating with thermostat	✓
Engine oil Titan Cargo 15W40	✓
Oil draining hand pump	✓
Fuel filter with water separator	✓
Coolant Fuchs Maintain Fricofin LL-35	✓
Starting batteries 2x 100 Ah	✓
Battery charger	✓
GCB Schneider NSX 400 3P + Mic.2.3	✓
GCB shunt release coil	✓
Controller ComAp IntelliLite AMF 25	✓
Acoustic alarm	✓
Emergency stop button	✓
Welded frame with fuel tank	✓
Frame with drip tray	✓
Fuel level measurement	✓
Exhaust compensator	✓
Engine and alternator vibro isolators	✓
Silencer delivered with the generator	✓
Transportation brackets	✓

### OPTIONAL EQUIPMENT

Battery disconnection switch	✓
GCB 4P Schneider NSX Micrologic 2.3	✓
Power Lock type power output	✓
Power socket box	✓
Transfer switch controlled by generator controller	✓
Transfer switch with ATS controller	✓
GPRS communication card	✓
Ethernet card	✓
RS 485, RS 232 card	✓
Remote display	✓
Non-standard fuel tank size	✓
External fuel tank 1 000 – 10 000 l	✓
3-way valve for external fuel tank connection	✓
Fuel tank filling pump and shut-off valve	✓



**FOCUSED ON GENERATORS ONLY**

**Power Generator FDF 200 V**

### INSTALLATION GUIDELINES

Power terminal	GCB terminal
Recommended cable for up to 30m power cable way	Flexible 5x150 mm <sup>2</sup>
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm <sup>2</sup>

\*For additional cable connection with FOGO ATS see ATS wiring diagram

Exhaust pipe min diameter (max. 7 m, 4 bends)	101,6 mm
Exhaust pipe min diameter (max. 15 m, 4 bends)	114,3 mm

### MAINTENANCE GUIDELINES

Fuel filters replacement	500 h / 1 year
Oil replacement	After first 100h, then every 500 h / 1 year
Oil filters replacement	After first 100h, then every 500 h / 1 year
Coolant replacement	1000 h / 2 years
Battery replacement	2 years
Electrical installation supervising	According to local requirements, at least once per year

### WARRANTY

Continuous work generators	12 months up to 1000 working hours
----------------------------	------------------------------------

Wersja: 01.2021

Datasheet could be changed without notification

[www.fogo.pl](http://www.fogo.pl)

**FOGO Sp. z o.o.**  
ul. Świąteczowska 36, Wilkowice  
64-115 Świąteczowa

tel. +48 65 534 11 80  
fax +48 65 534 11 81  
[generators@fogo.pl](mailto:generators@fogo.pl)